




One Stop Solution for Construction Material Needs

Export Product Catalogue

Panel Box | Insulation Panel

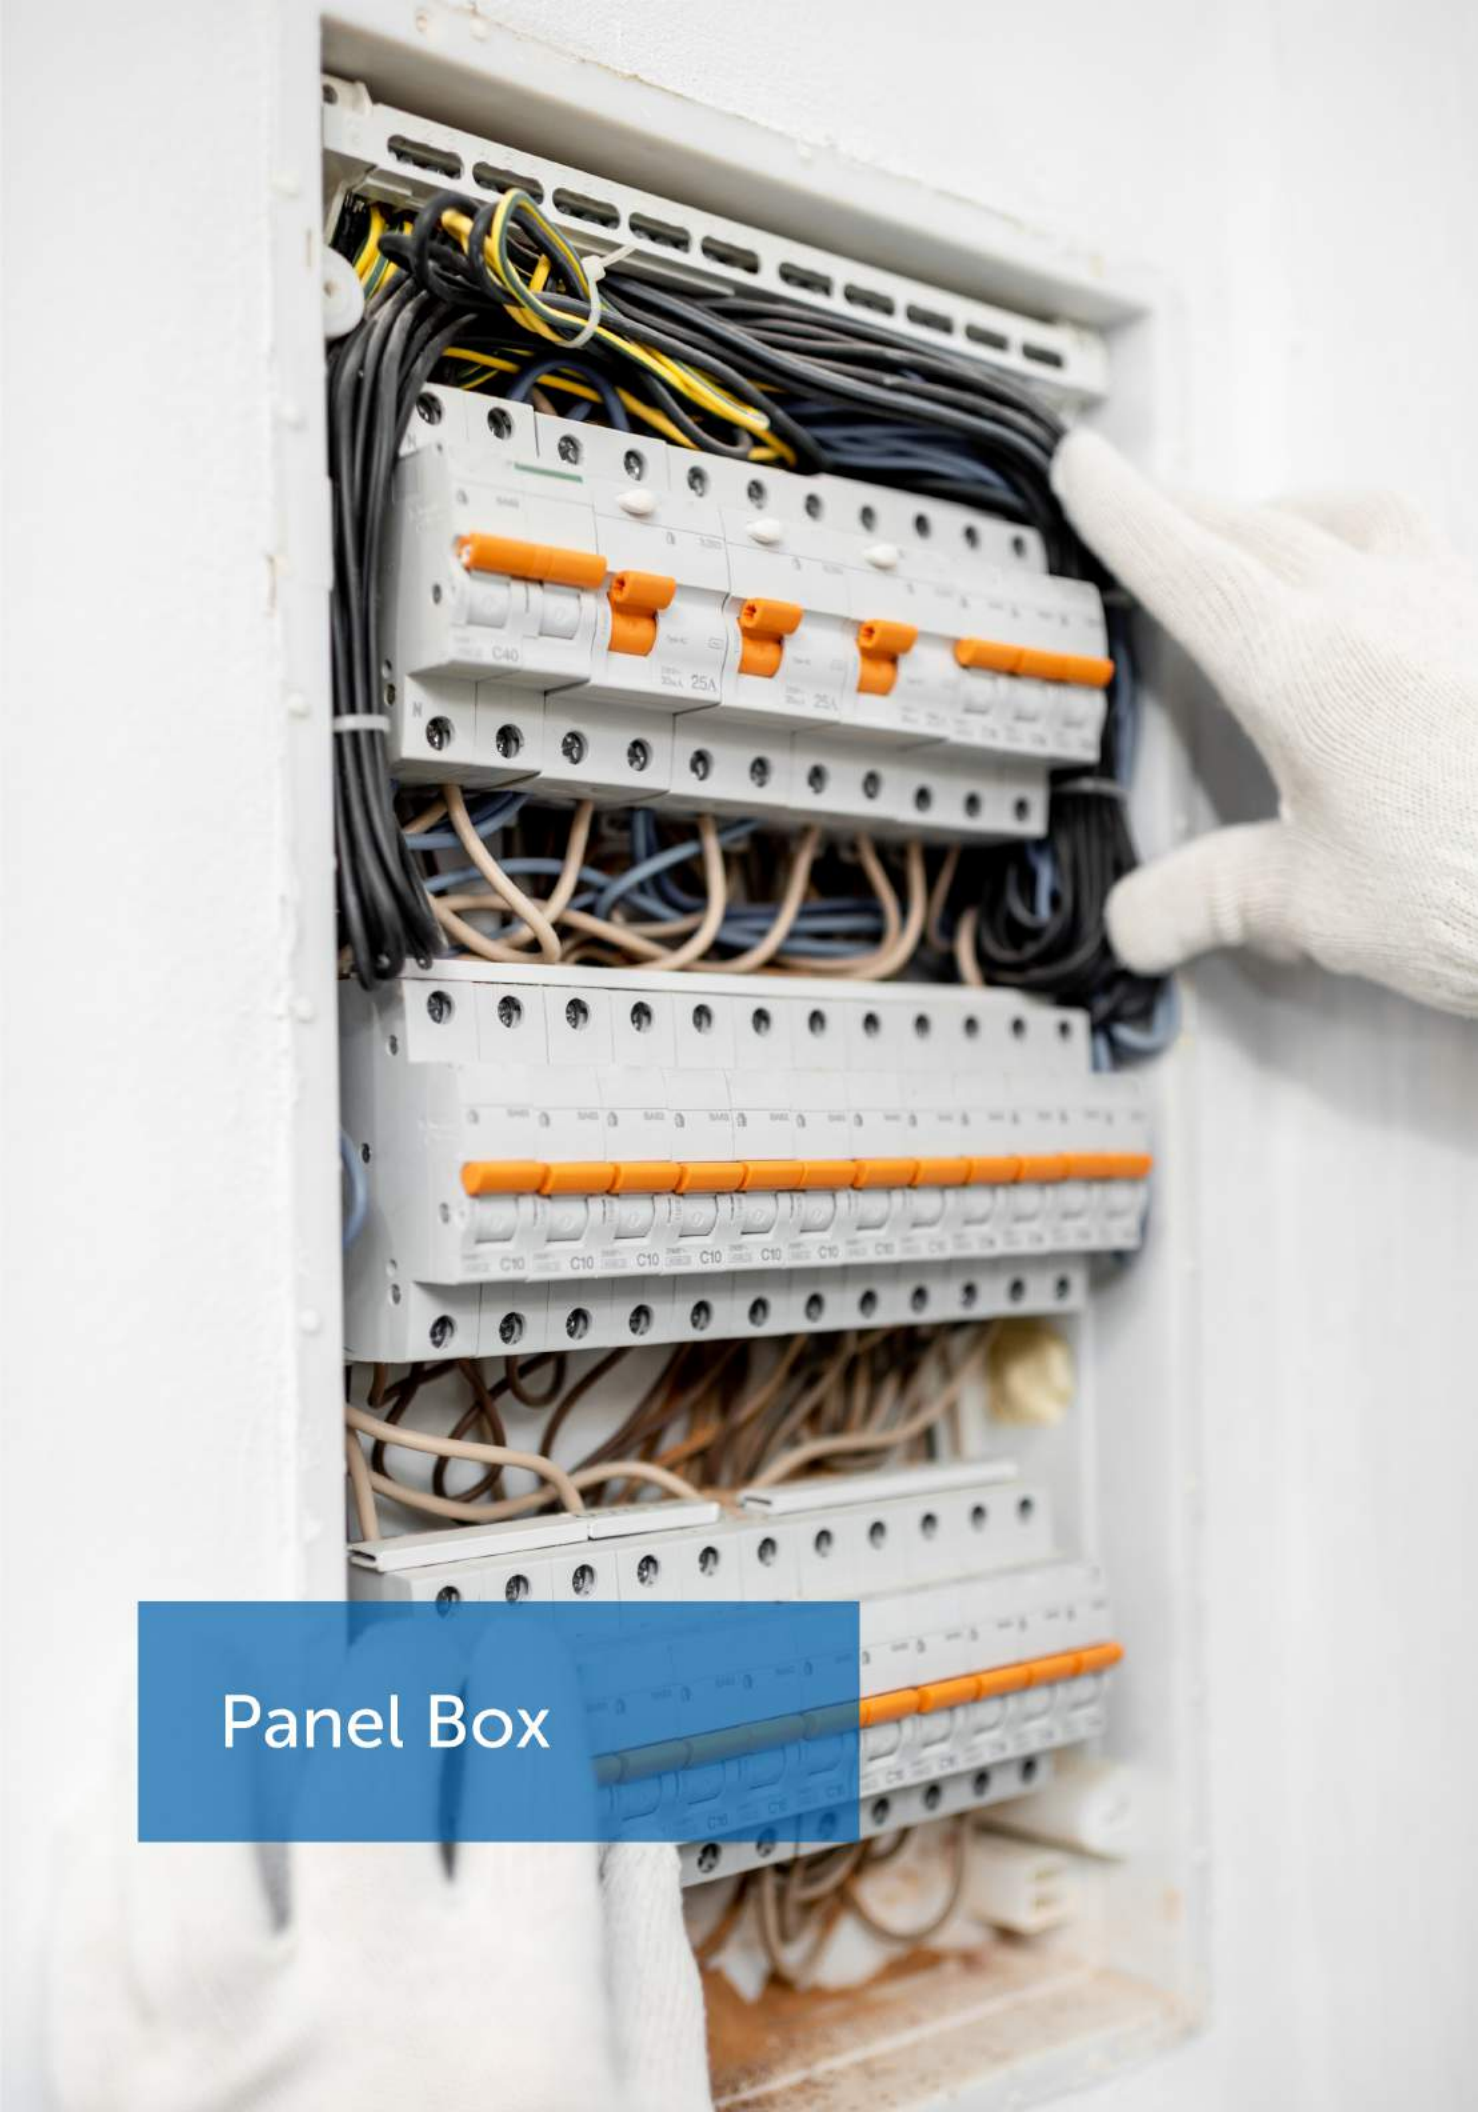

Panel Box

Pl. I. Panel Box

01. XPRO Panel




Push Lock

Type	Ukuran
PC XPRO - 01	20 x 30 x 12
PC XPRO - 02	25 x 25 x 12
PC XPRO - 03	25 x 35 x 12
PC XPRO - 04	30 x 40 x 15
PC XPRO - 04A	30 x 40 x 20
PC XPRO - 05	40 x 50 x 20
PC XPRO - 06	40 x 60 x 20
PC XPRO - 07	50 x 60 x 20
PC XPRO - 08	50 x 70 x 20
PC XPRO - 09	60 x 80 x 20
PC XPRO - 10	60 x 120 x 25
PC XPRO - 11	80 x 120 x 25

Rotaty Lock

Type	Ukuran
PC XPRO - 01	20 x 30 x 12
PC XPRO - 02	25 x 25 x 12
PC XPRO - 03	25 x 35 x 12
PC XPRO - 04	30 x 40 x 15
PC XPRO - 04A	30 x 40 x 20
PC XPRO - 05	40 x 50 x 20
PC XPRO - 06	40 x 60 x 20
PC XPRO - 07	50 x 60 x 20
PC XPRO - 08	50 x 70 x 20
PC XPRO - 09	60 x 80 x 20
PC XPRO - 10	60 x 120 x 25
PC XPRO - 11	80 x 120 x 25

02. Standard Panel

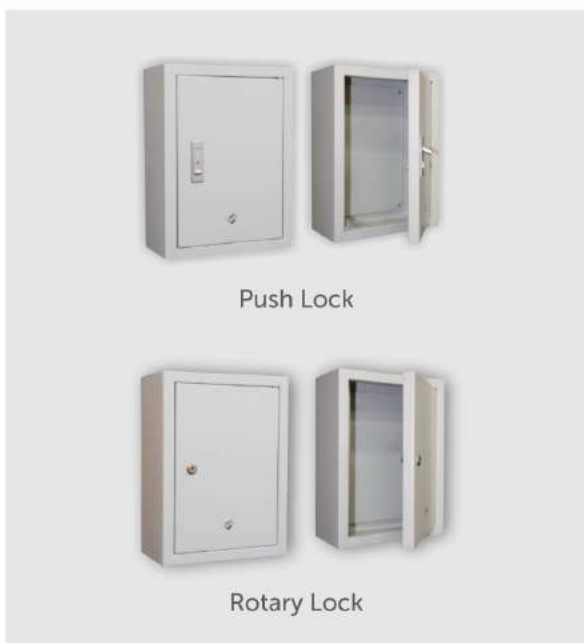

Push Lock

Type	Ukuran
PC - 01	20 x 30 x 12
PC - 02	25 x 25 x 12
PC - 03	25 x 35 x 12
PC - 04	30 x 40 x 15
PC - 04A	30 x 40 x 20
PC - 05	40 x 50 x 20
PC - 06	40 x 60 x 20
PC - 07	50 x 60 x 20
PC - 08	50 x 70 x 20
PC - 09	60 x 80 x 20
PC - 10	60 x 120 x 25
PC - 11	80 x 120 x 25

Rotaty Lock

Type	Ukuran
PC - 01	20 x 30 x 12
PC - 02	25 x 25 x 12
PC - 03	25 x 35 x 12
PC - 04	30 x 40 x 15
PC - 04A	30 x 40 x 20
PC - 05	40 x 50 x 20
PC - 06	40 x 60 x 20
PC - 07	50 x 60 x 20
PC - 08	50 x 70 x 20
PC - 09	60 x 80 x 20
PC - 10	60 x 120 x 25
PC - 11	80 x 120 x 25

Insulation Panel



High
Insulation
Effect



Humid
and Moisture
Resistance



Temperature
Resistance



Chemical
and Biological
Resistance



Robust
and Pressure
Resistance



Recycleable
Foam




Non Flammable
and Non Dripping



Free
CFC and HCFC

Pl. II. Insulation Panel


01. Roof Insulation

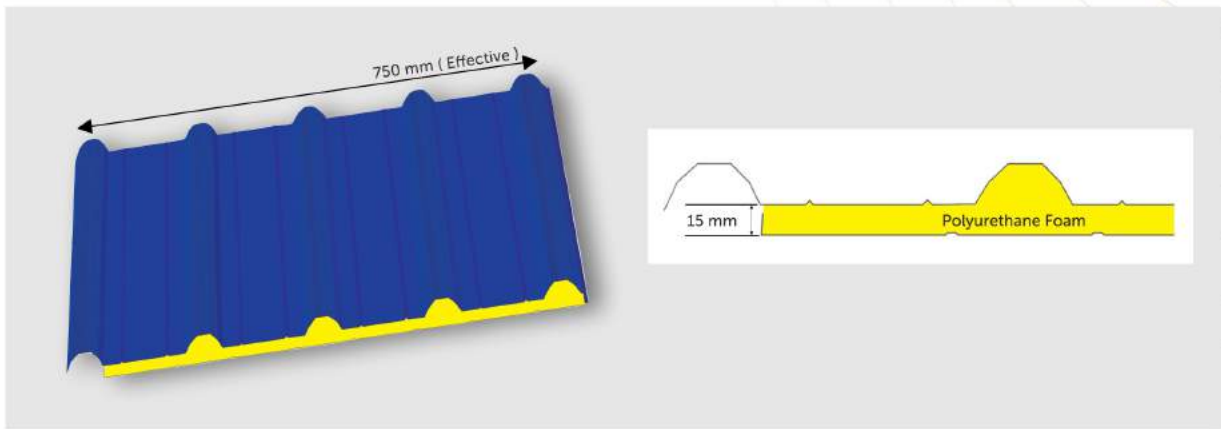


Product Specification:

- Code: TU5-75
- Foam Material: PUR, PIR, and HFO
- Effective Width: 750 mm
- Upper Skin: Metal GL, PPGL, PPGI 0.25 – 0.50 mm
- Bottom Skin: Metal GL, PPGL, GI, PPGI 0.30 mm & Aluminum PVC Sheet
- Foam Thickness: 15 – 25 mm
- Foam Density: 40 – 45 kg/m³
- Joint System: Overlapping Ribs
- Installation: Horizontal & Vertical
- Gutter & Joint: Sabe Steel TR5-75, Nok-V & Nok CR5-75


Joint System



Overlapping Ribs

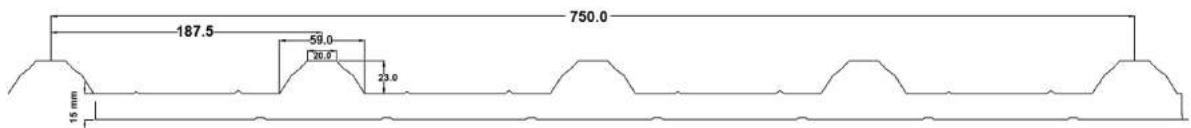


02. Wall Insulation

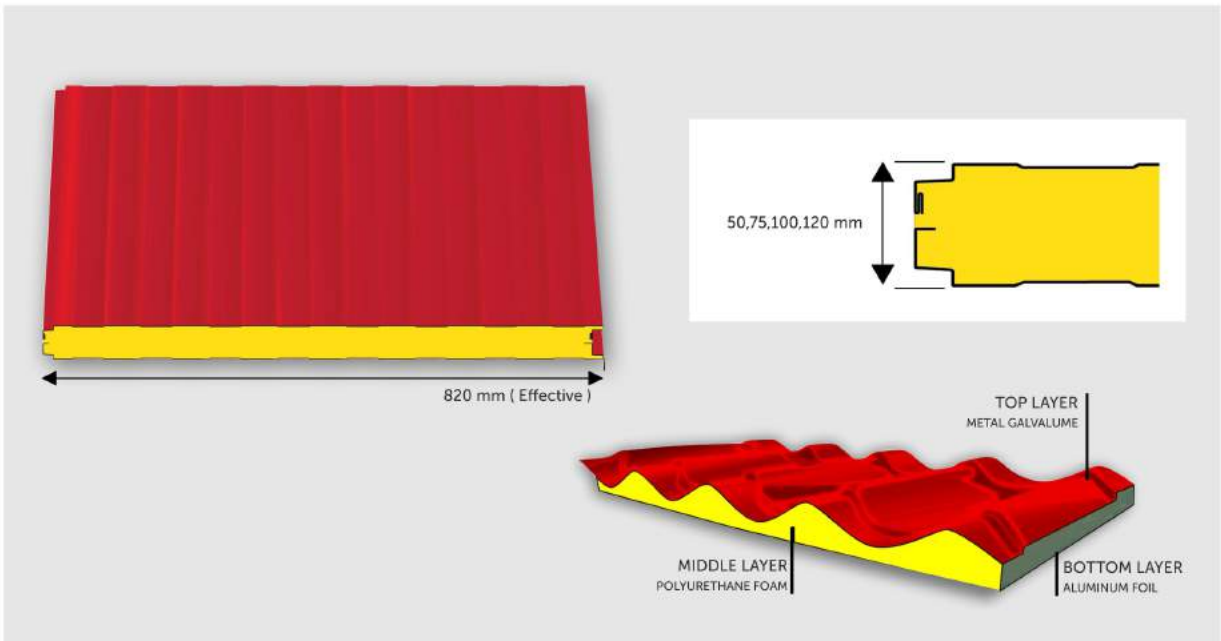

Product Specification:

- Code: WU8-20
- Foam Material: PUR, PIR, and HFO
- Effective Width: 820 mm
- Upper Skin: Metal GL, PPGL, PPGL 0.30 – 0.60 mm
- Bottom Skin: Metal GL, PPGL, GI, PPGL 0.30 – 0.60 mm
- Foam Thickness: 50, 75, 100, 120 mm
- Foam Density: 40 – 45 kg/m³
- Joint System: Clipping System (Air Leak Free)
- Installation: Vertical

Air-Free Joint

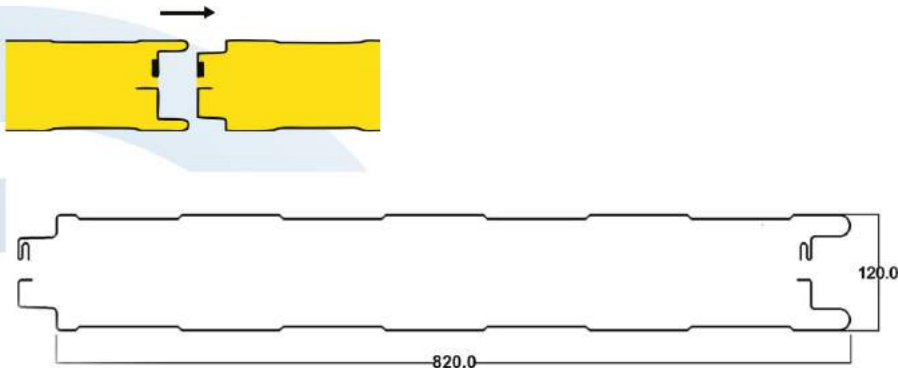






Project References


Residentials

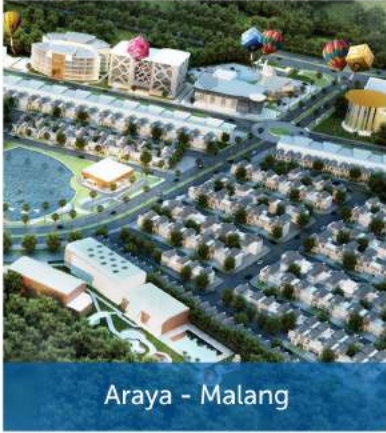

Araya - Malang



Forest Cerme - Gresik

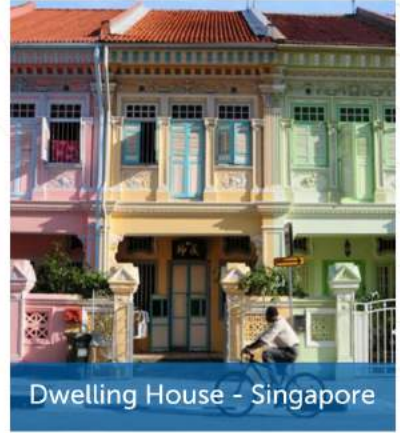

Dwelling House - Singapore

Hotels



Mercure Hotel - Jakarta



Sheraton Hotel - Jakarta



Zoom Hotel - Surabaya

Buildings



Aeon Mall - Malang



Galaxy Mall 3 - Surabaya



Ministry of National Development - Singapore

And Many Other Projects.



www.sutindo.com